



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Contractor's choice thermoplastic emergency light with sleek, compact design
- Part of Astralite's quick ship program

### CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Two-step fast-and-easy installation

### LAMP

- Utilizes (2) high-efficiency 1W adjustable LED emergency heads

### ELECTRONICS

- Dual -voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

### BATTERY

- 3.6V nickel-cadmium battery is standard and provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10° C - 40° C

### OPTIONS

- Self-testing and remote capability may be ordered separately

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated.

## EU-MR16-LED

THERMOPLASTIC LED EMERGENCY LIGHT



## DIMENSIONS

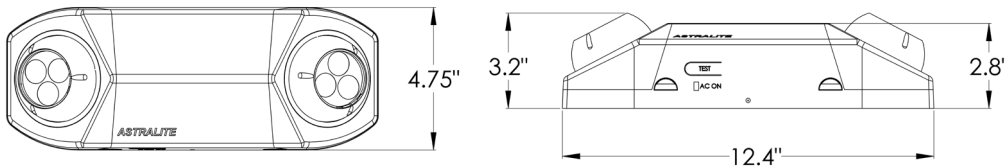

## ORDERING GUIDE

MODEL	HOUSING FINISH	OPTIONS
<div style="border: 1px solid black; height: 20px; width: 100%;"></div> <b>EU-MR-16-LED</b> Thermoplastic LED Emergency Light	<div style="border: 1px solid black; height: 20px; width: 100%;"></div> <b>W</b> White Housing <b>B</b> Black Housing	<div style="border: 1px solid black; height: 20px; width: 100%;"></div> <b>SD</b> Self Diagnostics Option <b>REM</b> Remote Capability <b>LC</b> Line Cord (3-ft)