



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Architectural-grade EXIT-EM combo with self diagnostics option
- Style is the difference
- Designed for single-face wall mount applications

### CONSTRUCTION

- Elegant plated alloy construction
- Choose from five metal finishes: silver, gold, satin nickel, antique brass, or bronze; contact factory for custom finishes
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance

### LAMP

- Uses two 5W 6V halogen or 1W 6V LED MR-16 lamps in emergency mode
- EXIT face is illuminated by long-lasting high-output AllnGaP LEDs with a rated life of 10+ years

### ELECTRONICS

- Dual-voltage Input capability: 120/277V
- Low-voltage disconnect
- Brownout protection
- AC indicator LED with test switch
- Self Diagnostics comes standard

### BATTERY

- Nickel-cadmium battery comes standard
- Provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 0 °C to 40 °C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## LB-200

SPECIAL PLATED EXIT-EM COMBO UNIT



## DIMENSIONS

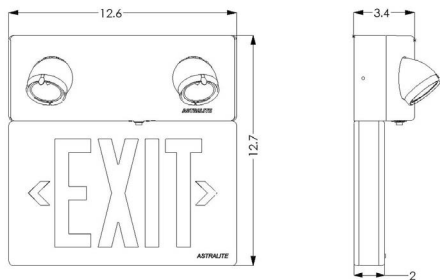

Material	Mounting	Battery	Code Compliance	Dimensions
Plated Alloy	Wall	Nickel-cadmium	UL 924	12.6" W X 12.7" H X 3.4" D

## ORDERING GUIDE

MODEL	LETTER COLOR	CHEVRONS	HOUSING COLOR	OPTIONS
<b>LB-200</b> Architectural Grade Combo	<b>R</b> Red <b>G</b> Green	<b>AL</b> Arrow Left <b>AR</b> Arrow Right <b>AB</b> Arrow Left and Right <b>NC</b> No Chevrons	<b>SI</b> Silver <b>GO</b> Gold <b>SN</b> Satin Nickel <b>AB</b> Antique Brass <b>BZ</b> Bronze	<b>220</b> 220 VAC Input